
ORDER CODE
CP0 - - - 1 - F

- **F** : RoHS Compliance
- Plating of contact area
Omit : Au 0.1 μ m min. (Standard)
H : Au 0.76 μ m min.
- Shield plate
1 : With shield plate
 95 pin : 19 shield contacts
 110 pin : 22 shield contacts
- Number of contacts
095 : 95 pin **110** : 110 pin
- Variation
00 : Receptacle Without guide lug and space for key (Type B)
01 : Receptacle With guide and space for key (Type A, 110 pin only)
- Series name
CP : 2mm pitch hard metric 2 piece connector



Schareggstrasse 3, CH-5506 Mägenwil
 Tel. +41 62 896 00 48, Fax. +41 62 896 25 80
 info@admatec.ch, www.admatec.ch

CP1 - - - - F

- **F** : RoHS Compliance
- Plating of contact area
Omit : Au 0.1 μ m min. (Standard)
H : Au 0.76 μ m min.
- Ground contact
1 : With ground contact
2 : Without ground contact
3 : Hot Swap (Type A, 110 pin)
4 : Computer Telephony (Type A, 84 pin and Type B, 110 pin)
- Terminal length
P2 : 3.7mm (0.146")
R : 16mm (0.630")
- Number of contacts
055 : 55 pin **084** : 84 pin (Computer Telephony only)
095 : 95 pin **110** : 110 pin
125 : 125 pin
- Variation
10 : Plug without guide slot and space for key (Type B)
11 : Plug with guide slot and space for key (Type A, 110 pin only)
12 : Plug (Type C, 55 pin only)
- Series name
CP : 2mm pitch hard metric 2 piece connector

FEATURES

- Conforms to IEC 61076-4-101 standard
- Connectors for CompactPCI bus
- High density connection
- High speed transmission and EMI protection
- Applicable to "Hot Plug" (Sequenced mating)
- Highly reliable press-fit mounting
- A computer telephony support connector is available
- Highly reliable contacts with 2 mating points for Receptacles
- Available backplane assemblies and rack systems
- RoHS compliance

SPECIFICATIONS

- Insulator material : Glass-filled PBT (UL 94V-0), Gray
- Contact material : Copper alloy
- Contact plating : Contact area; Gold over Nickel
Terminal area; Gold over Nickel
- Shield plate material: Copper alloy
- Shield plate plating : Contact area; Gold over Nickel
Terminal area; Gold over Nickel
- Shroud material : Glass-filled PBT(UL 94V-0), Gray
- Current rating : 1A per contact
- Contact resistance : 30m Ω max.
- Dielectric withstanding voltage : 750V AC for 1 minute
- Insulation resistance : 10,000M Ω min. at 100V DC
- Operating temperature : -55 $^{\circ}$ C to +125 $^{\circ}$ C

[APPLICATIONS]

•Process controllers, Power plant systems, Industrial computing, Semiconductor processing units, Telecommunications, Measuring equipment, Medical equipment, Aerospace, Other industrial equipment, etc.

[KEL'S SPECIAL FEATURES]

•KEL is able to provide backplane assembly products (Connectors are pre-mounted on board) to decrease the customer's assembly processes, as KEL operates a backpanel business.
 Please contact your local sales office for more information.






•KEL also can supply optional connector installation tools, please refer to pagel-16.

CP00-□□□-1□-F (Receptacle, Type B)



Mating Connector : CP10-□□□-P2-1□-F

Unit:mm(inch)


Receptacle, Type B

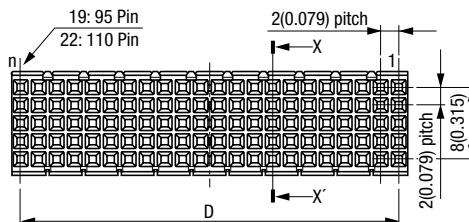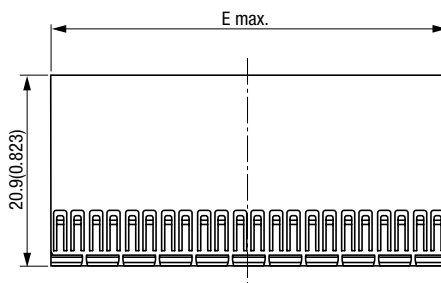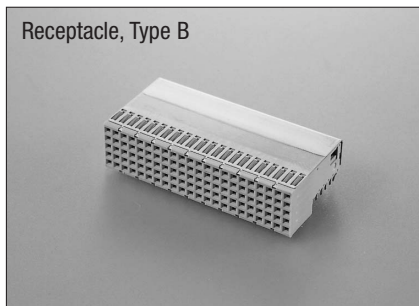

X-X' Cross Section

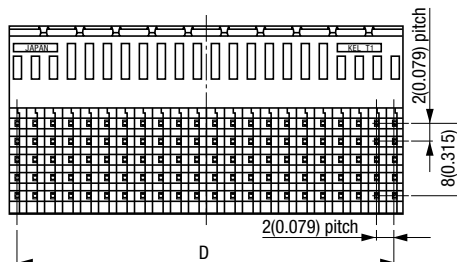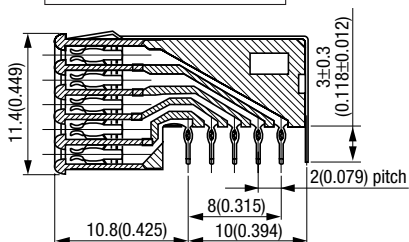

Printed Circuit Board Layout (Component Side View)

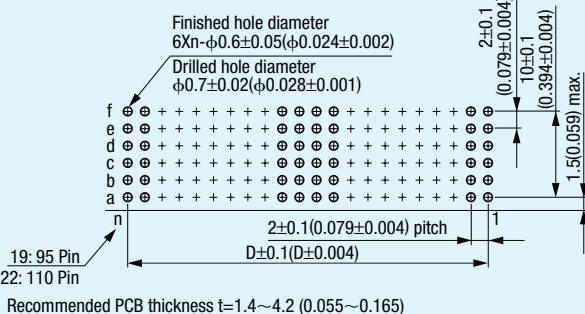




Product Table / Dimensions

No. of contacts	Part Number	D	E
95	CP00-095-1□-F	36.00 (1.417)	37.90 (1.492)
110	CP00-110-1□-F	42.00 (1.654)	43.90 (1.728)

Row "f" odd numbers : For upper ground return shield
 Row "f" even numbers : For lower ground return shield (future option)

CP01-110-1□-F (Receptacle, Type A)
Mating Connector : CP11-110-P2-1□-F

Unit:mm(inch)

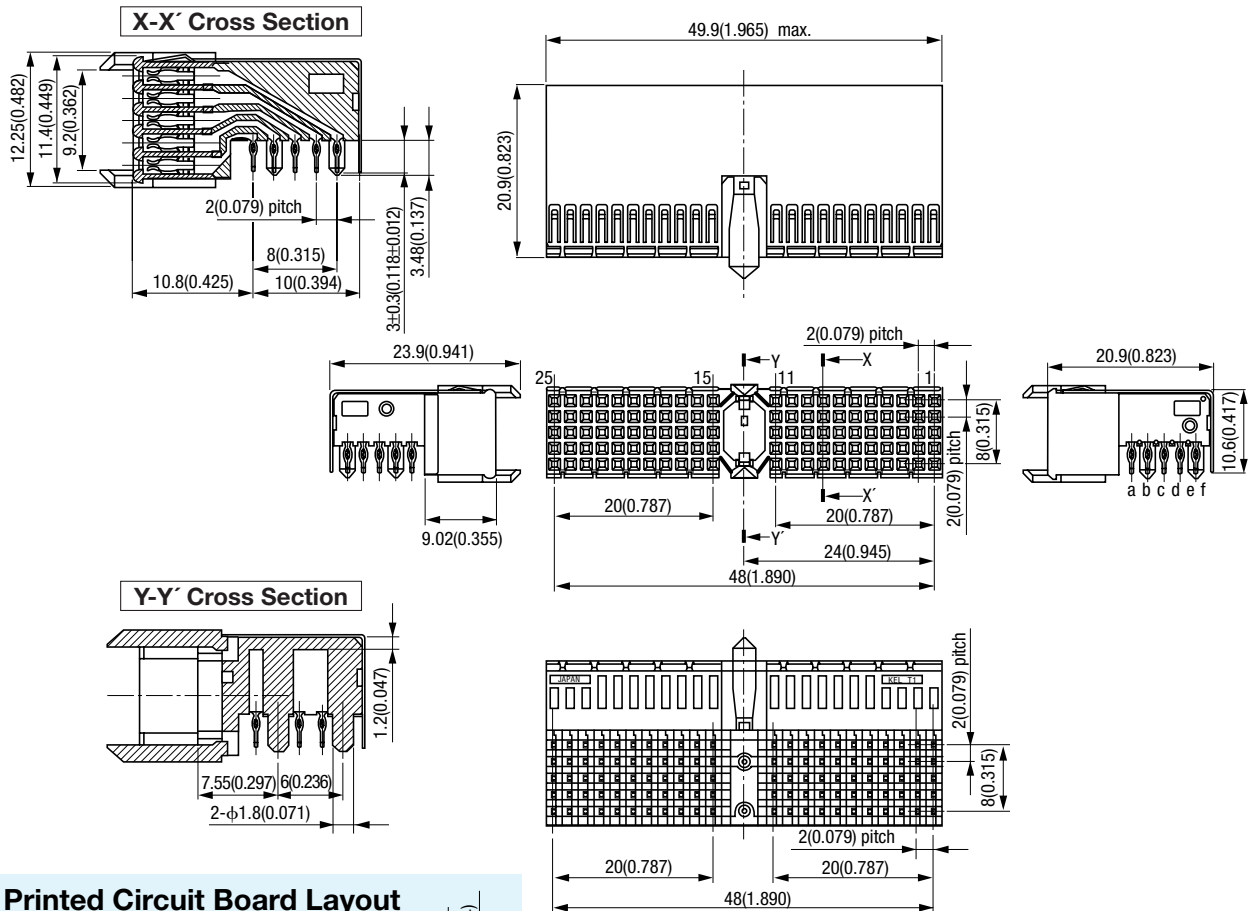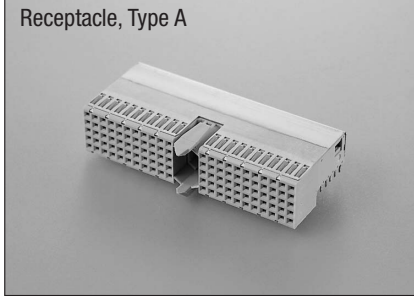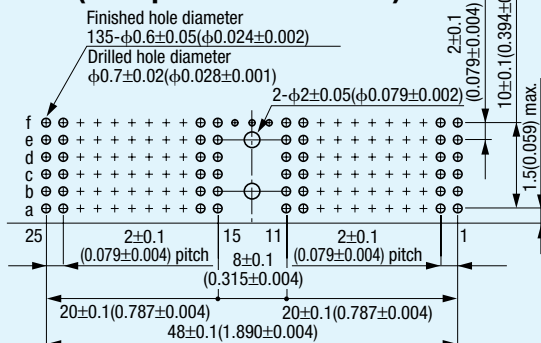
Printed Circuit Board Layout (Component Side View)


Recommended PCB thickness t=1.4~4.2 (0.055~0.165)


Row "f" odd numbers : For upper ground return shield

Row "f" even numbers : For lower ground return shield (future option)

CP10-□□□-P2-1□-F (Plug, Type B)


Mating Connector : CP00-□□□-1□-F

Unit:mm(inch)




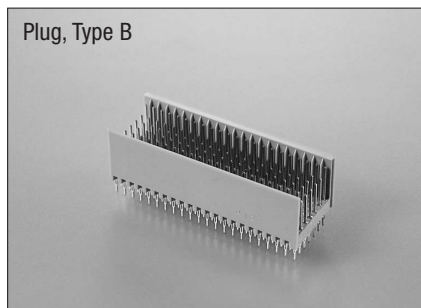


Plug, Type B



X-X' Cross Section



Contact Dimension

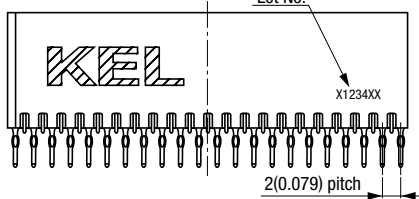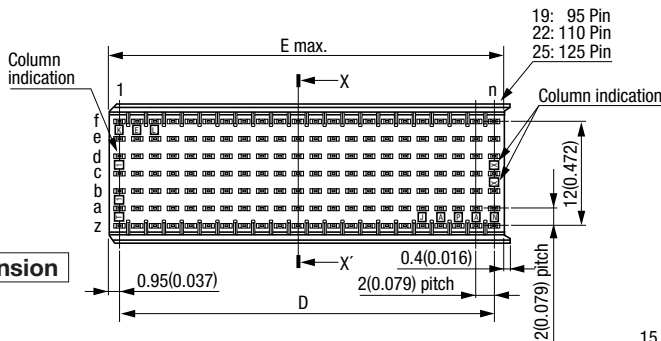


Layout for Different Contact Levels

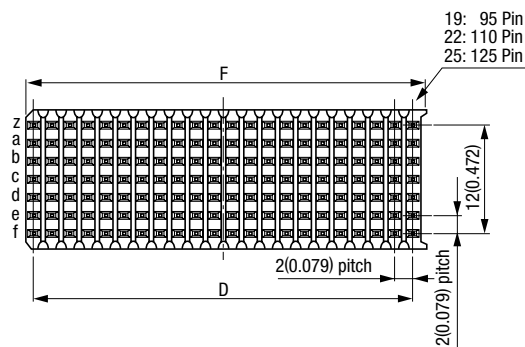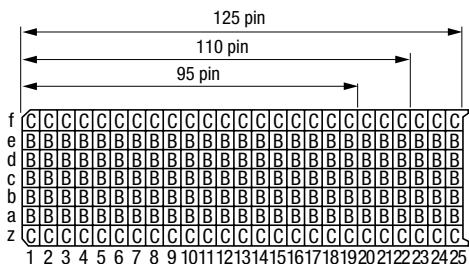

* For B and C contact levels, please refer to "Contact Dimension".

Printed Circuit Board Layout (Component Side View)

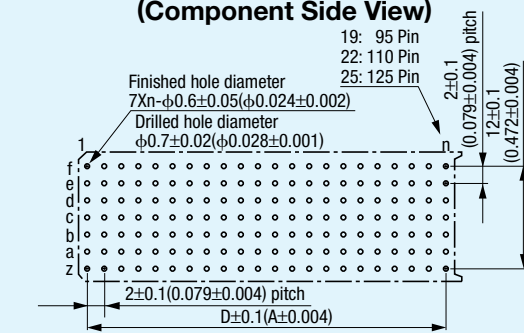

Recommended PCB thickness t=1.4~5.6(0.055~0.220)

Rows "z" and "f" : For ground return shield contacts


Product Table / Dimensions

No. of contacts	Part Number	D	E	F
95	CP10-095-P2-1□-F	36.00 (1.417)	37.85 (1.490)	38.25 (1.506)
110	CP10-110-P2-1□-F	42.00 (1.654)	43.85 (1.726)	44.25 (1.742)
125	CP10-125-P2-1□-F	48.00 (1.890)	49.85 (1.963)	50.25 (1.978)


Terminal length	G
P2	3.7 (0.146)

CP12-055-P2-1□-F (Plug, Type C)


Unit:mm(inch)

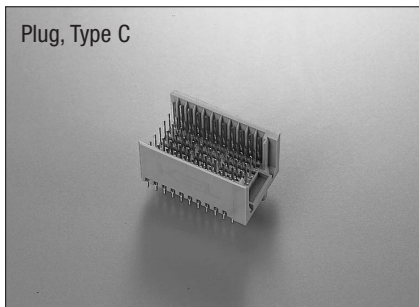





Plug, Type C

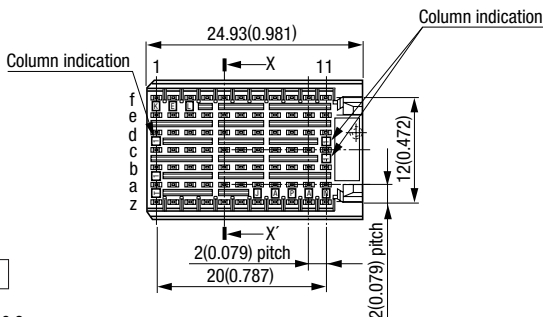


X-X' Cross Section



Contact Dimension




Printed Circuit Board Layout (Component Side View)

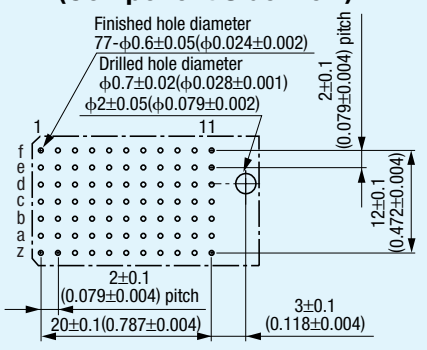

Recommended PCB thickness t=1.4~5.6(0.055~0.220)

Layout for Different Contact Levels










* For B and C contact levels, please refer to "Contact Dimension".

Rows "z" and "f" : For ground return shield contacts


Terminal length	G
P2	3.7 (0.146)

CP10-□□□-R-1□ (Plug, Tail Length 16mm, Type B)

Unit:mm(inch)

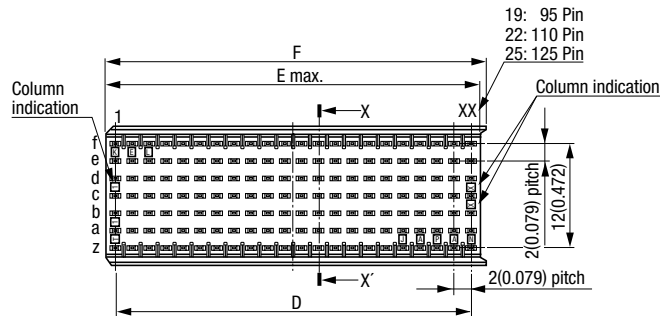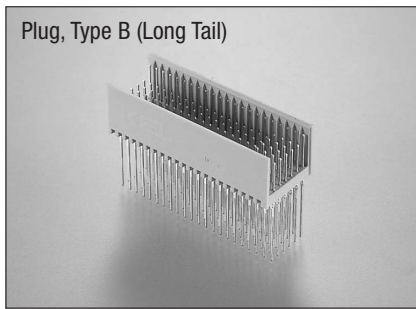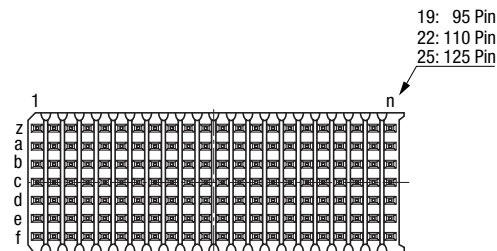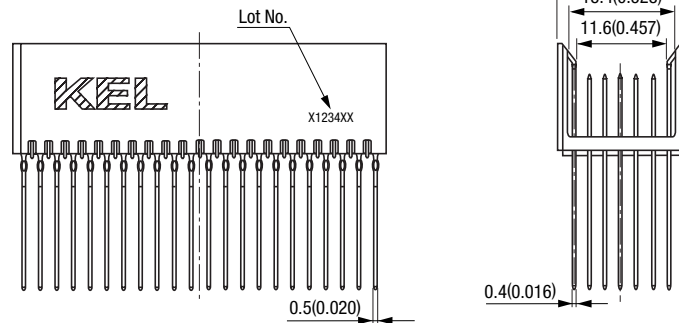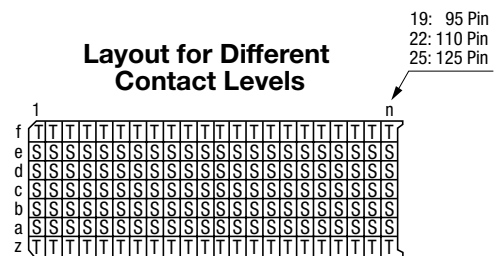
X-X' Cross Section

Contact Dimension

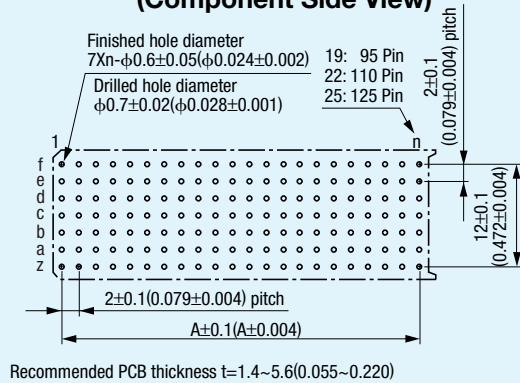Layout for Different Contact Levels


* For S and T contact levels, please refer to "Contact Dimension".

Printed Circuit Board Layout (Component Side View)


Rows "z" and "f": For ground return shield contacts

Product Table / Dimensions


No. of contacts	Part Number	D	E	F
95	CP10-095-R-1□	36.00 (1.417)	37.85 (1.490)	38.25 (1.506)
110	CP10-110-R-1□	42.00 (1.654)	43.85 (1.726)	44.25 (1.742)
125	CP10-125-R-1□	48.00 (1.890)	49.85 (1.963)	50.25 (1.978)

CP12-055-R-1 (Plug, Tail Length 16mm, Type C)


Unit:mm(inch)







Plug, Type C (Long Tail)

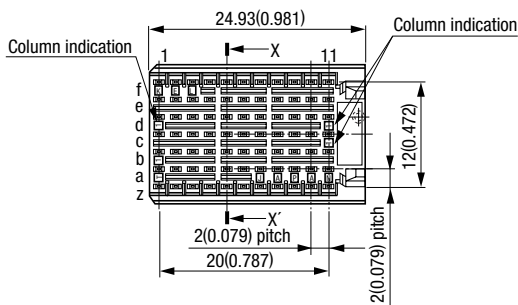


X-X' Cross Section



Contact Dimension

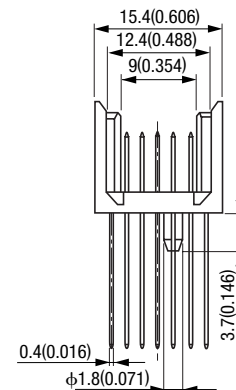


Layout for Different Contact Levels



* For S and T contact levels, please refer to "Contact Dimension".

Printed Circuit Board Layout (Component Side View)

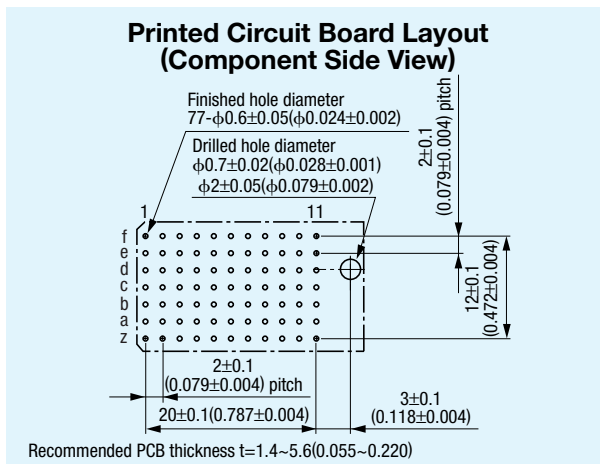


Rows "z" and "f" : For ground return shield contacts


CP10-110-R-4 (Plug, Tail Length 16mm, Computer Telephony, Type B)

Unit:mm(inch)





Plug, Type B (Long Tail, Computer Telephony)

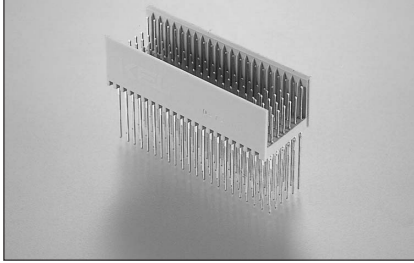


X-X' Cross Section



Contact Dimension

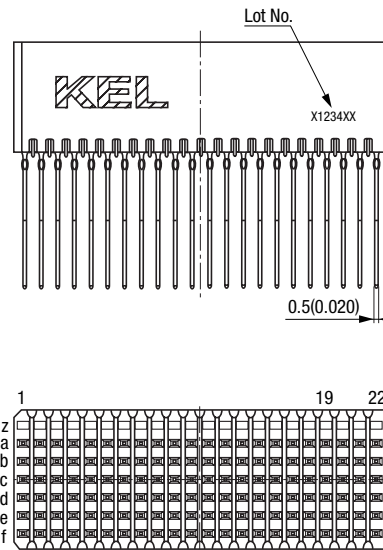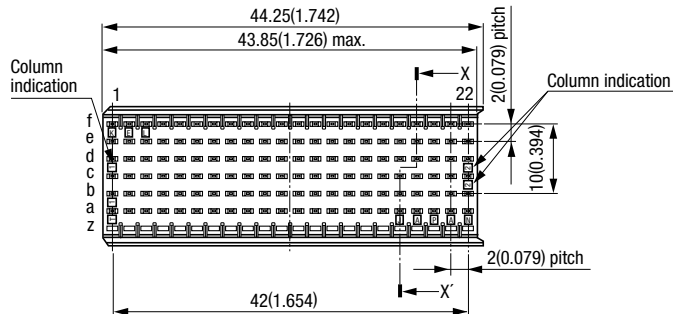


Layout for Different Contact Levels

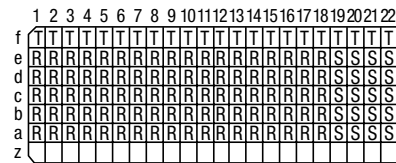

* For R, S and T contact levels, please refer to "Contact Dimension".

Printed Circuit Board Layout (Component Side View)

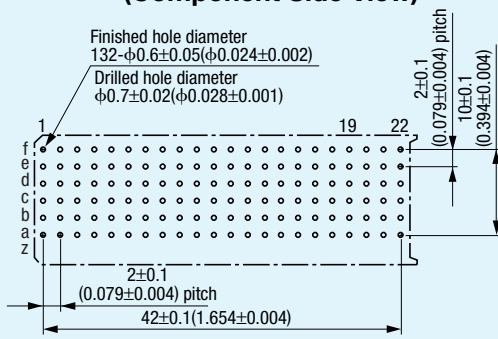



Recommended PCB thickness t=1.4~5.6(0.055~0.220)

Row "f" : For ground return shield contacts


CP11-110-P2-3-F (Plug, Hot Swap, Type A)

Unit:mm(inch)




Plug, Type A (Hot Swap)

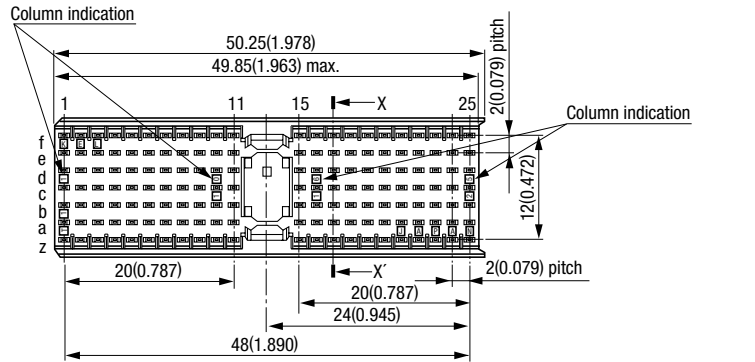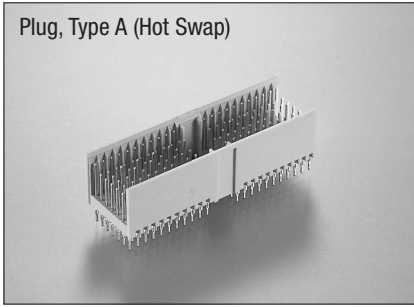

X-X' Cross Section



Contact Dimension

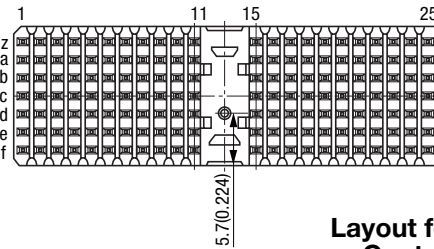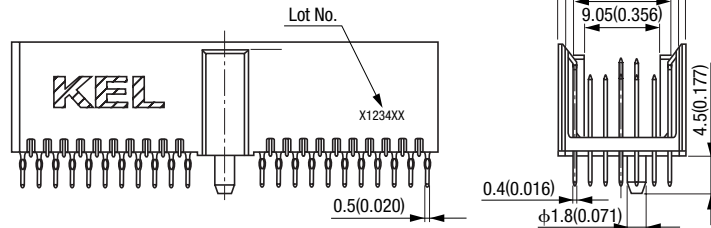


Layout for Different Contact Levels

	1	2	3	4	5	6	7	8	9	10	11	15	16	17	18	19	20	21	22	23	24	25	
f	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
e	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
d	B	B	C	B	B	B	C	B	C	B	A	C	B	C	B	C	B	C	B	B	B	B	B
c	B	C	B	C	B	B	B	B	B	B	B	B	B	B	C	B	C	B	B	B	B	B	B
b	B	B	B	B	B	B	B	B	B	B	B	B	B	A	B	B	B	B	B	B	B	B	B
a	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
z	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C

* For A, B and C contact levels, please refer to "Contact Dimension".

Printed Circuit Board Layout (Component Side View)


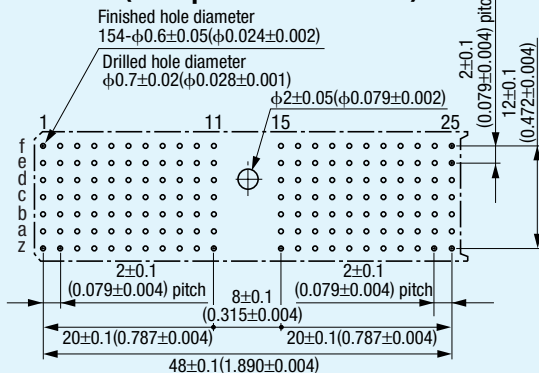


Recommended PCB thickness t=1.4-5.6(0.055-0.220)


Rows "z" and "f" : For ground return shield contacts

CP11-084-P2-4-F (Plug, Computer Telephony, Type A)





Unit:mm(inch)

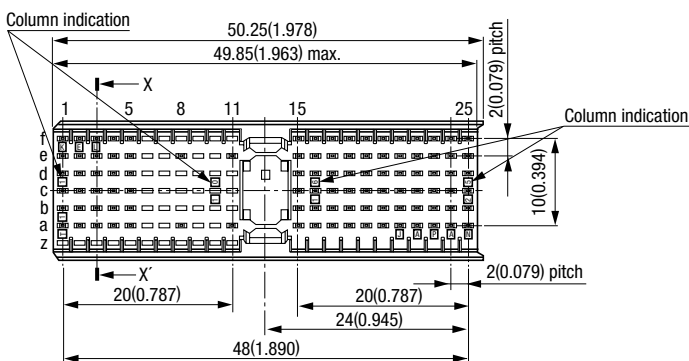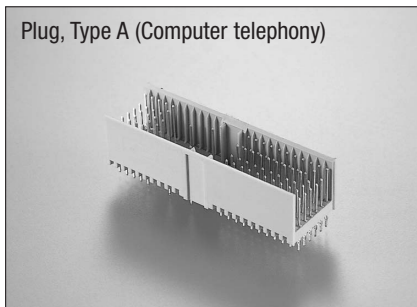

X-X' Cross Section



Contact Dimension

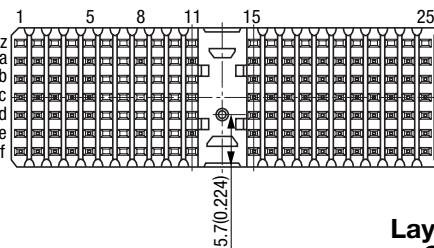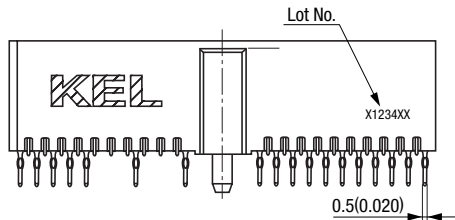


Layout for Different Contact Levels

	1	2	3	4	5	6	7	8	9	10	11	15	16	17	18	19	20	21	22	23	24	25	
f	C	C	C	C	C							C	C	C	C	C	C	C	C	C	C	C	C
e	B	B	B	B	B	C					B												B
d	B	B	B	B	B							C	C	C	C	C	C	C	C	C	C	C	B
c	B	B	B	B	B							B	B	B	B	B	B	B	B	B	B	B	B
b	B	B	B	B	B							B	B	B	B	B	B	B	B	B	B	B	B
a	B	B	B	B	C						B												B
z																							

* For A, B and C contact levels, please refer to "Contact Dimension".


Printed Circuit Board Layout (Component Side View)

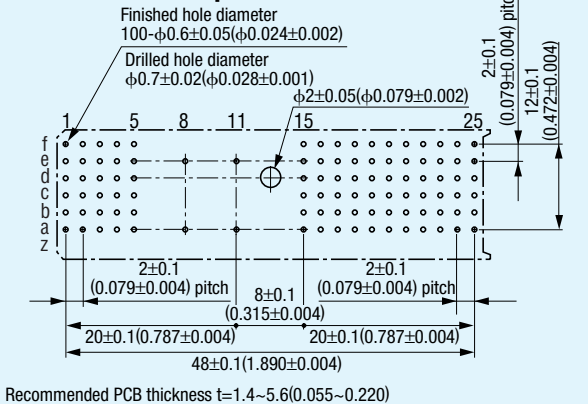


Row "f" : For ground return shield contacts

CP10S-□□□-41 (Shroud, Type B)

Shroud, Type B

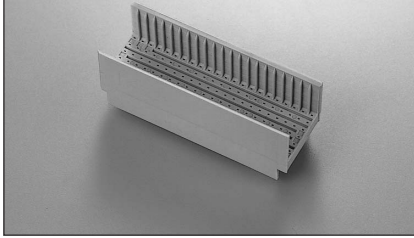
ORDER CODE
CP10S-□□□-41


- Spacer height
41: 4.1mm (0.161")
- Number of contacts
095 : 95 pin
110 : 110 pin
125 : 125 pin
- Series name
CP10S : Shroud without guide and space for key (Type B)

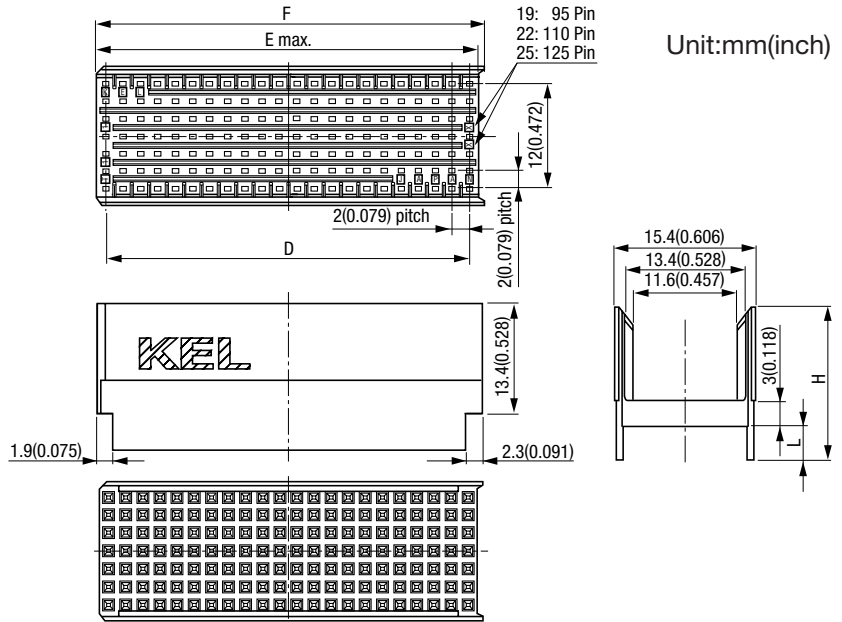
Product Table / Dimensions


No. of contacts	Part Number	D	E	F	H	L
95	CP10S-095-41	36.00 (1.417)	37.85 (1.490)	38.25 (1.506)	17.50 (0.689)	4.10 (0.161)
110	CP10S-110-41	42.00 (1.654)	43.85 (1.726)	44.25 (1.742)	17.50 (0.689)	4.10 (0.161)
125	CP10S-125-41	48.00 (1.890)	49.85 (1.963)	50.25 (1.978)	17.50 (0.689)	4.10 (0.161)

CP11S-110-41 (Shroud, Type A)


Shroud, Type A

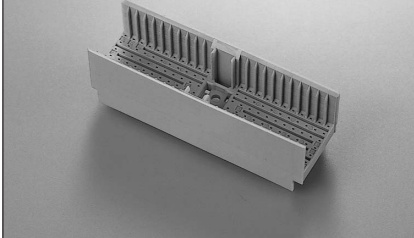
ORDER CODE
CP11S-110-41

- Spacer height
41: 4.1mm (0.161")
- Number of contacts
110 : 110 pin
- Series name
CP11S : Shroud with guide and space for key (Type A, 110 pin only)

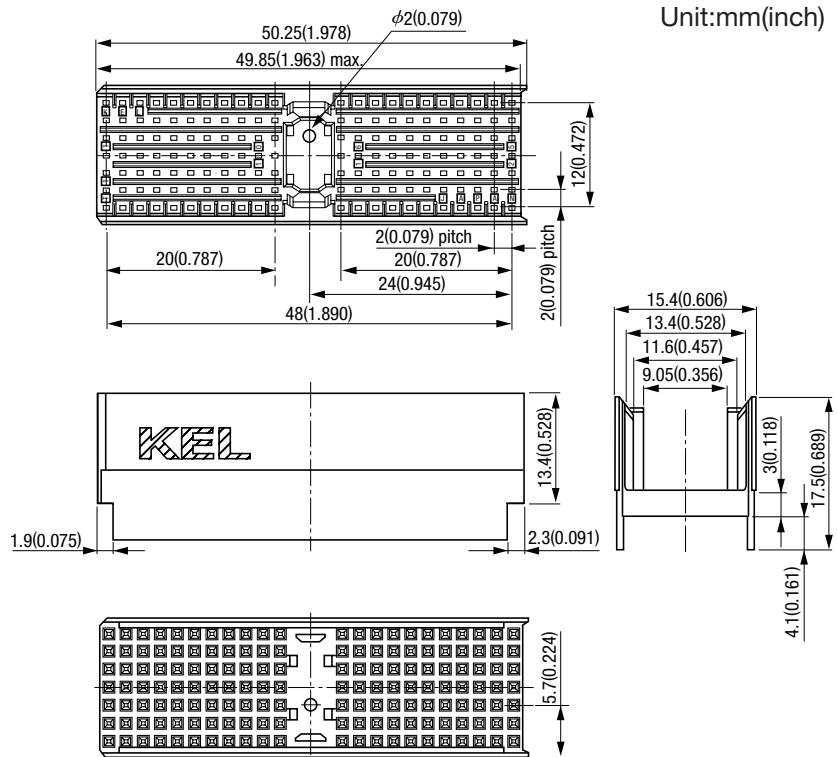


CP12S-055-41 (Shroud, 55 pin, Type C)

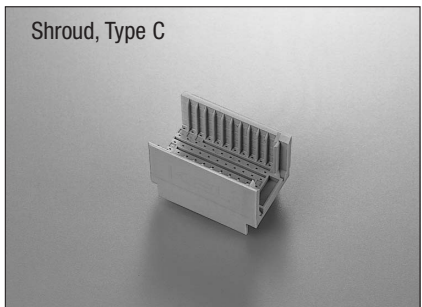


ORDER CODE

CP12S-055-41

- Series name
CP12S : Shroud (Type C, 55 pin only)
- Number of contacts
055 : 55 pin
- Spacer height
41: 4.1mm (0.161")

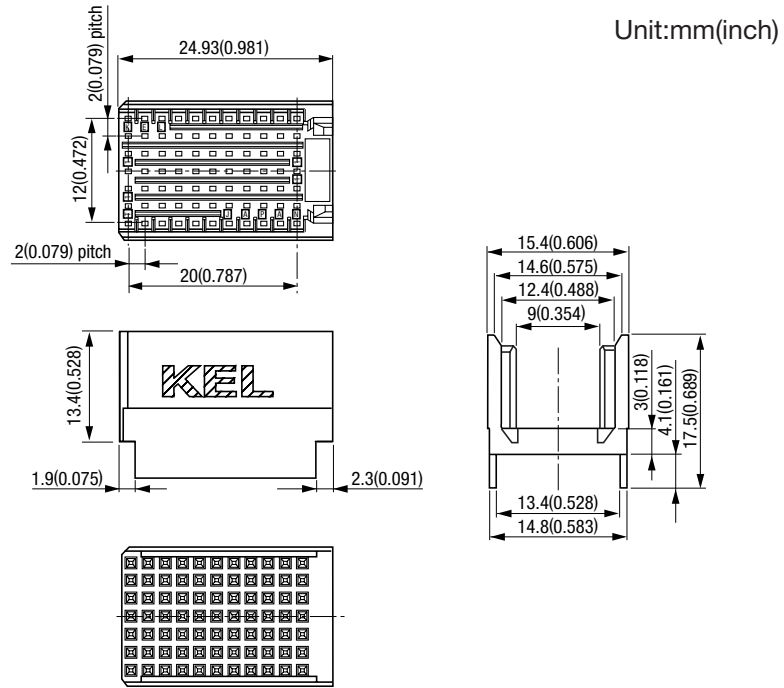

CP-K (Coding Key)

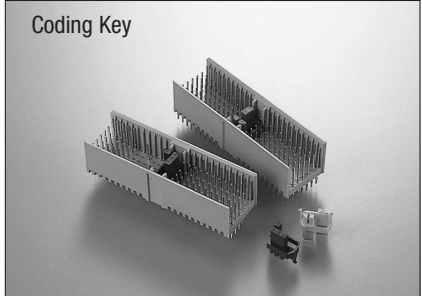

ORDER CODE (Coding Key)



CP-K

- Coding key type
K1 : 5.0V (Color : Brilliant blue)
K2 : 3.3V (Color : Cadmium yellow)
K3 : Computer telephony type, Plug only (Color : Strawberry red)
- Applicable connector
0 : For Receptacle
1 : For Plug
- Series name

SPECIFICATIONS

● Insulator material : Glass-filled PBT (UL 94V-0)


CP0-K (For Receptacle) CP1-K (For Plug)

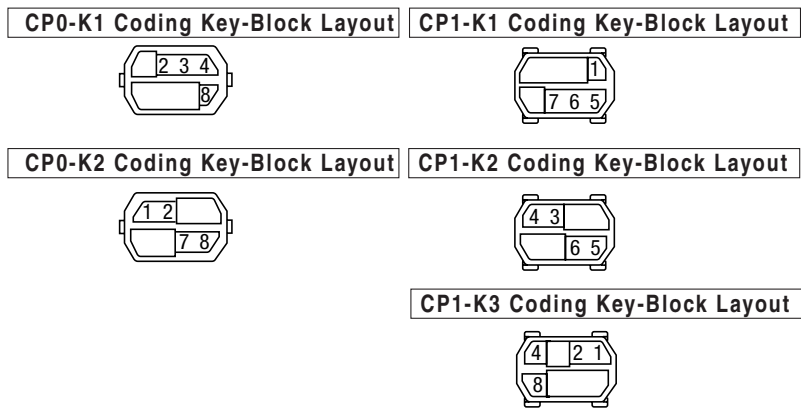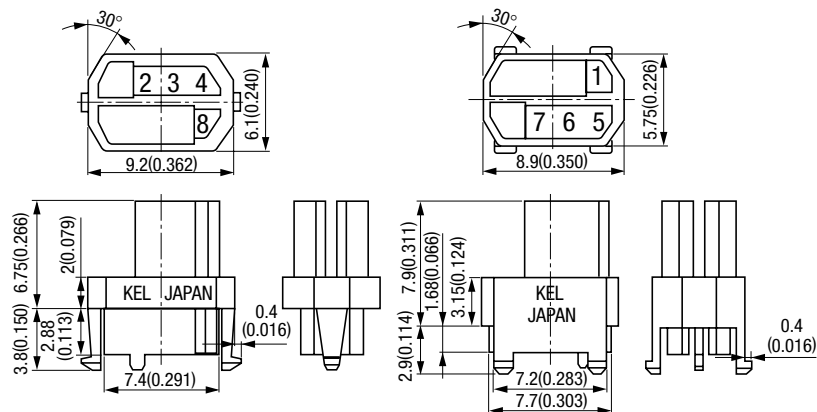

Connector Installation Tools

Outline for Press-Fit Installation Tool For Plug Connector

This Product requires installation tools to mount on PCB as shown. Both Plug and receptacle connectors can be installed only by replacing "Seating platen and PCB support module" (Other parts are common to both applications). The figure is a composite illustration depicting use of a 3U board type. Please contact your local sales office for further information on the installation tools.

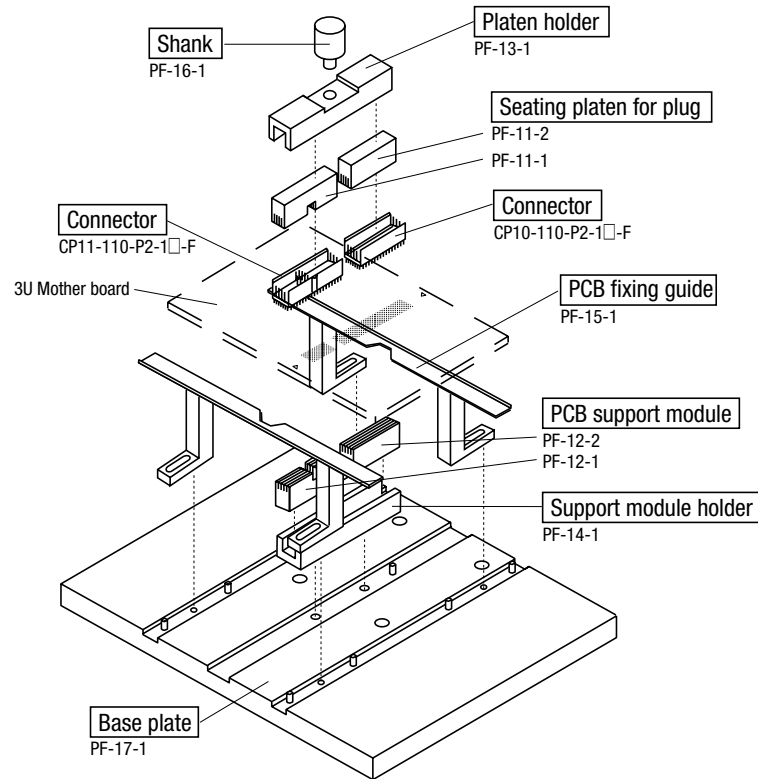

Schareggstrasse 3, CH-5506 Mägenwil
Tel. +41 62 896 00 48, Fax. +41 62 896 25 80
info@admatec.ch, www.admatec.ch

For Receptacle Connector

Hand press
HP-100

